


Mini PLC Optical Splitter 1x16, SC/APC, 1 m

Fiber Optics / Optical Splitters

PLC mini 1x16 · SC/APC · 1260-1650 nm · 1 m

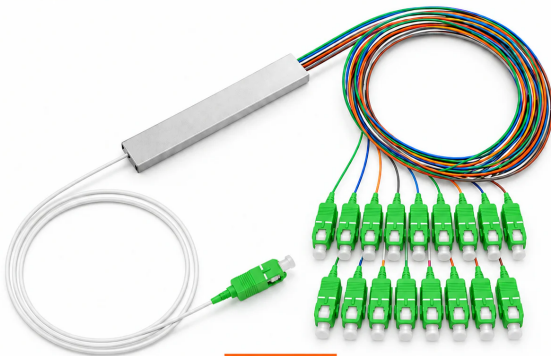

DIVISOR ÓPTICO PLC MINI 1x16 SC/APC

1 entrada y 16 salidas · 1,0 m

KG-FO-PLC-1X16-APC

Technology

PLC — Planar Lightwave Circuit

Format

Rectangular metal module

Configuration

1 input × 16 outputs

Key features

- 1 input and 16 optical outputs.
- SC/APC termination on the input and output fibers.
- Wavelength of 1260-1650 nm.
- Insertion loss of 13.5 dB according to the manufacturer datasheet.
- Body of 60 × 12 × 4 mm.
- Fibers of 1.0 m according to the quoted version.
- Uniform power distribution using PLC technology.
- Passive component, no external power supply.

Technical specifications

Parameter	Specification
Technology	PLC — Planar Lightwave Circuit
Format	Rectangular metal module
Configuration	1 input × 16 outputs
Termination	SC/APC
Power distribution	Uniform

Technical specifications

Parameter	Specification
Fiber length	1.0 m (quoted version)
Wavelength	1260–1650 nm
Insertion loss (catalog)	13.5 dB
PDL (catalog)	0.25 dB
Body dimensions (L × W × H)	60 × 12 × 4 mm
Operating temperature	–40 to +85 °C
Fiber	G657A or as specified by the customer
Uniformity (max., family table)	1.2 dB
Wavelength dependence (max., family)	0.8 dB
Thermal stability (max., –40 to +85 °C)	0.5 dB
Storage temperature	–40 to +85 °C
Return loss (catalog value)	55 dB; limit direction to be confirmed
Directivity (catalog value)	55 dB; limit direction to be confirmed
Operation	Passive
Sales unit	1 optical splitter
Packaging	Resealable bag
Image	Series reference image. The number of outputs corresponds to the configuration specified for this SKU.
Specification basis	Manufacturer datasheet for this technology, configuration and termination. Values published in the catalog.
Warranty	5 years

Applications

FTTH / PON networks

Distribution of one feeder fiber to 16 branches, depending on the power budget and network configuration.

Distribution points

Integration in boxes, trays and cabinets with adequate fiber space.

Expansion and maintenance

Selection by technology, output count and connector termination.

Distribution by building zone

Assign optical outputs to different areas or subscribers and label each branch; calculate accumulated losses before adding further splits.

Packaging & contents

1 optical splitter in a resealable bag. The described box is part of the splitter only for BOX models.

Warranty

KONGIA 5-year warranty.

Declared compliance

RoHS · ISO 9001 · REACH · CE Compliant