


Slim RJ45 Patch Cord CAT6 UTP 0.1 m (10 cm)

Structured Cabling / Network Patch Cords

KONGIA Cat6 Slim Patch Cord, 0.1 m, UTP, 28 AWG and RJ45 8P8C connectors. Made with virgin raw materials and 99.99% oxygen-free copper (OFC), with performance up to 250 MHz.



7 COLORES DISPONIBLES

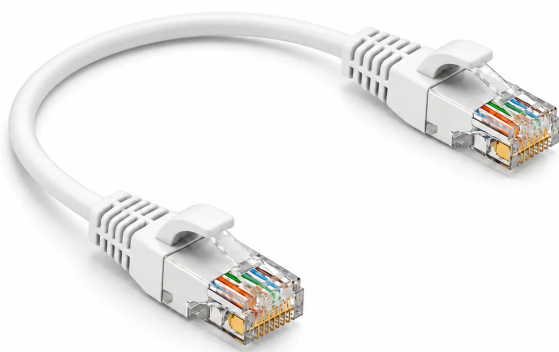

PATCH CORD CAT6

Slim UTP • 0,1 m

KG-PC6-U-SL-0.1M

Product Type

Cat6 Slim RJ45 Patch Cord

Network Category

Cat6

Cable Design

Slim

Key features

- 99.99% oxygen-free copper (OFC) stranded conductor; does not use CCA
- Jacket, insulation and boot made from virgin raw materials, without recycled plastic
- Cat6 UTP for professional Ethernet networks
- 28 AWG conductor with RJ45 male 8P8C termination at both ends
- Nominal performance up to 250 MHz
- Reduced diameter and high flexibility: reduces cable congestion and simplifies identification and maintenance
- Seven colors available to identify services, VLANs, equipment or areas
- Nominal length of 0.1 m for a clean, controlled installation

Technical specifications

Parameter	Specification
Product Type	Cat6 Slim RJ45 Patch Cord
Network Category	Cat6
Cable Design	Slim
Shielding	UTP

Technical specifications

Parameter	Specification
Conductor Material	99.99% oxygen-free copper (OFC); no CCA
Conductor Gauge	Flexible stranded 28 AWG
Insulation and Jacket Materials	Virgin raw materials, without recycled plastic
Number of Pairs	4 twisted pairs / 8 conductors
Nominal Impedance	100 Ω
Connectors	RJ45 male 8P8C to RJ45 male 8P8C
Pin Assignment	T568B, straight-through connection
Length	0.1 m
Transmission Speed	Up to 1 Gbps (1000BASE-T); backward-compatible with lower-speed Ethernet
Nominal Frequency	Up to 250 MHz
Design and Reference Standards	ANSI/TIA-568.2-D Cat6; ISO/IEC 11801 Class E; IEEE 802.3ab / 802.3u
PoE Compatibility	Compatible when the channel, gauge, length, temperature and bundling meet the applicable edition of IEEE 802.3
Available Colors	White, blue, black, gray, red, yellow and green
Compatibility	switches, Cat6 patch panels, NVRs, servers and RJ45 equipment
Recommended Use	Indoors; final performance depends on the complete channel and installation compliant with the category
Certifications and Compliance	RoHS · REACH SVHC · CE DoC · CNAS · ISO 9001
Warranty	5 years

Applications

Racks and Communications Cabinets

Connection between patch panels, switches and RJ45 equipment with a length of 0.1 m that helps reduce excess cable and keep the rack front organized.

Enterprise LANs

Use in dense racks, wall cabinets and patch panels, respecting channel category and good routing and bend-radius practices.

Structured Cabling and IP CCTV

Interconnection of routers, NVRs, IP cameras, access points, workstations and other Ethernet devices.

Professional Distribution and Installation

Seven color options facilitate circuit standardization, port documentation and inventory preparation for installers, integrators and distributors.

Warranty

KONGIA 5-year warranty.

Declared compliance

RoHS · ISO 9001 · REACH · CE Compliant · CNAS